

SUPERTECHNOCRANE 30'



30' Max Lens Height

SuperTechnocrane sets the industry standard for telescoping cranes, offering camera movements that could not be achieved with any fixed-length crane. The 30-footer has been the industry's trusted workhorse for more than a decade.


The SuperTechnocrane is designed to accommodate almost all film cameras and lenses; it can be configured to film in large and 3D formats, too.

The SuperTechno 30' can be mounted on dolly track for compound camera movement in high ceiling indoor spaces or outdoor locations.

SPECIFICATIONS


Dimensions

The chassis is 5'5" (1.65 m) long by 4'6" (1.36 m) wide, and minimum 6'11" (2.1 m) high. From post to nose, the retracted arm length is 8'10" (2.69 m), and 31'4" (9.55 m) extended.




Weights

The total all-in weight is 2,881 lbs (1,307 kgs). The crane arm weighs 706 lbs (320 kgs), the post weighs 176 lbs (80 kgs), and chassis weighs 286 lbs (130 kgs).

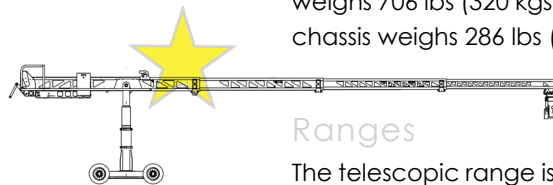

Ranges

The telescopic range is 22'8" (6.91 m) at speeds up to 6' /sec (1.83 m/sec). The arm has a +60° / -57° max tilt angle. The maximum camera lens height is 30' (9.2 m) underslung. The post range is 1'6" (0.45 m).



Accessories

Mountable on the Taurus mobile base or track. A variety of mounts are used to connect heads, including the nose plug, out front, Cineflip, and the Kornercrane Level. HME wireless headsets provide clear communication for crane operation.

CREATIVITY IN REACH®

www.procamrentals.com

(818) 717-0354

marketing@procamrentals.com



SUPERTECHNOCRANE 30'

