

SUPERTECHNOCRANE 22'

24' Max Lens Height


The SuperTechno 22' features a telescopic arm that allows the camera to extend its reach without the need for dolly track. Plus, filmmakers appreciate the SuperTechnocrane's versatility in smaller spaces when arm length and lens height are not negotiable. Another advantage of this telescopic crane is it can be equipped with the heaviest cameras with a max nose load of up to 185 pounds.

The chassis of the SuperTechno 22 is 4'6" wide with a minimum clearance height of 6'5", meaning that it can fit through most standard double door entrances and garage loading doors.

SPECIFICATIONS


Dimensions

The chassis is 5'5" (1.65 m) long by 4'6" (1.36 m) wide, and minimum 6'5" (2 m) high. From post to nose, the retracted arm length is 5'11" (1.80 m) and 25'5" (6.83 m) extended.




Weights

The total all-in weight is 1,927 lbs (874 kgs). The crane arm weighs 507 lbs (230 kgs), the post weighs 176 lbs (80 kgs), and chassis weighs 286 lbs (130 kgs).

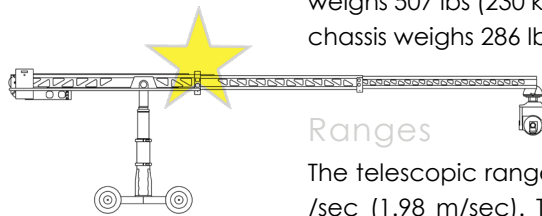

Ranges

The telescopic range is 16'10" (5.12 m) at speeds up to 6'6" /sec (1.98 m/sec). The arm has a 60° max tilt angle. The maximum camera lens height is 22' (6.7 m) underslung. The post range is 1'6" (0.45 m).



Accessories

Mountable on the Taurus mobile base or track. A variety of mounts are used to connect heads, including the nose plug, out front, Cineflip, and the Kornercrane Level. HME wireless headsets provide clear communication for crane operation.

CREATIVITY IN REACH®

www.procamrentals.com

(818) 717-0354

marketing@procamrentals.com



SUPERTECHNOCRANE 22'

